



April 22, 2013

**Attention: To All Proponents**

**Re: 5165Q – Supply and Delivery of Pool Air Handling Unit and Heat Recovery Ventilator - Addendum # 2**

This addendum forms part of the Contract Documents and shall be read, interpreted and coordinated with all other parts. Please review and consider the following information in the preparation of your Request for Quotation:

**Equipment Schedule 15961 – Heat Recovery Ventilator**

1. Revise: AHU-13 performance specifications
  - 1.1. Model: Engineered Air DJS40/0/HRP or equivalent
  - 1.2. Fan Type: Forward Curve
  - 1.3. Supply Fan motor H.P to be revised to: 7.5
  - 1.4. Heating Input to be revised to: 400 MBH
  - 1.5. Heating Output to be revised to: 320 MBH
  - 1.6. Leaving air temperature to be revised to: 60F
  
2. **Add: AHU-13 drawing attached for reference.**
  - 2.1. Specification Section 15763 – Air Handling Units
  - 2.2. Add: Clause 1.1.1.4 – Custom roof top air handling unit to be complete with O/A intake hood
  - 2.3. Add: Clause 1.1.6 – Air handling unit to be supplied complete with damper actuators. All controls to be wired to a terminal strip for connection by others.
  - 2.4. Revise: Clause 2.6.1 and 2.6.2 – Liner to be revised to a solid aluminum liner
  - 2.5. Revise: Clause 2.7.3 – All access doors shall be lockable
  - 2.6. Revise: Clause 2.7.10 – A silencer is not required for the unit.
  - 2.7. Revise: Clause 2.11 – Unit shall be complete with only 1 filter section with minimum Merv 8.
  - 2.8. Add: Clause 2.12.8 – Dampers shall be Tamco 1500 SW or equivalent.

1. Revise: Clause 2.17.4 – VSD’s shall be Yaskawa P1000 or an equivalent model from ABB or Danfoss.

**Attachments:**

- AHU-13 drawing

**DEADLINE REVISED:**

The closing deadline date has now been changed. The dead line time and date is now:

**Thursday, April 24, 2014 12:00pm local time.**

Please see the following pages.


**Please acknowledge receipt of this addendum by submitting a signed copy with your response.**

\_\_\_\_\_  
**Signature**

\_\_\_\_\_  
**Print Name & Title**

\_\_\_\_\_  
**Date**

Yours truly  
Daianna Panni  
*Buyer*

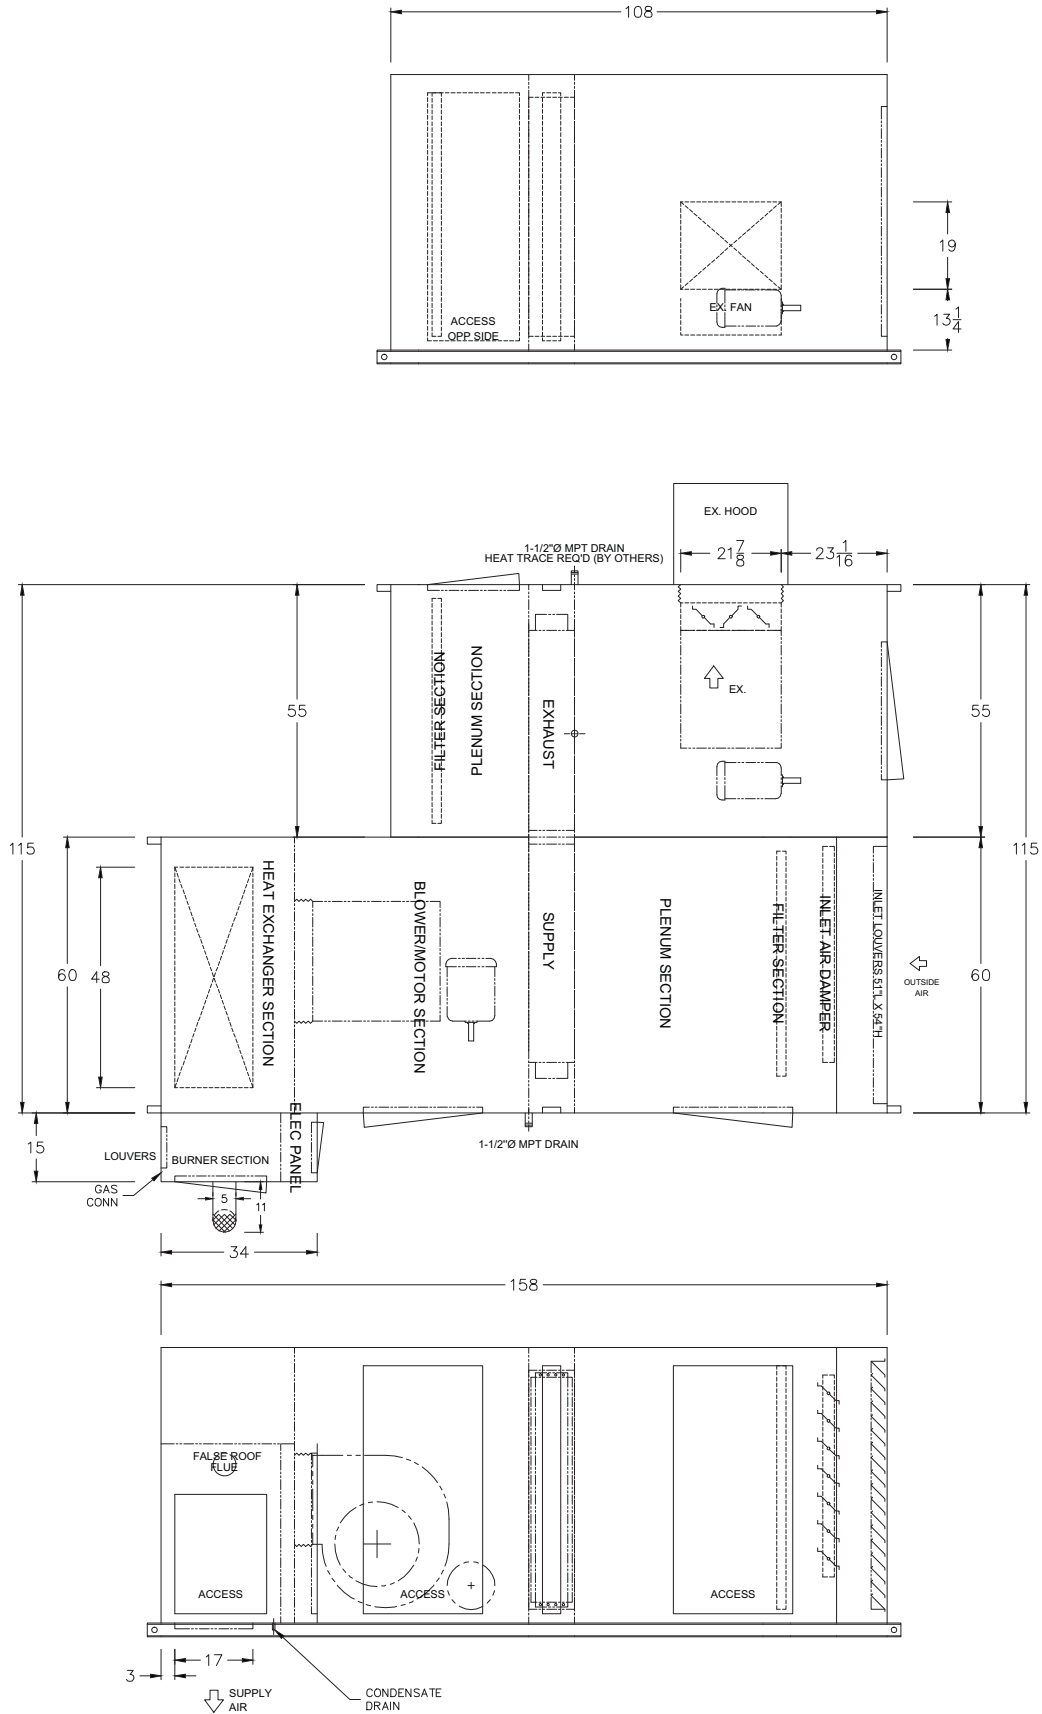

DOOR SIZES AND INTERNAL COMPONENTS ARE APPROX. VALUES. DIMENSIONS SHOWN IN INCHES ONLY UNLESS OTHERWISE NOTED.

Watermania  
TAG: AHU-13

DJS40/O

PRELIMINARY DRAWING ONLY - NOT FOR CONSTRUCTION.



REVISIONS:

DATE:  
APR 14 2014

DRWN BY:  
LJP

CHKD BY:  
-

DRWG NO.:

DRAWING PATH: P:\Prount